

## Optional Items



SmartBOX™ Cutting Accessory



Air Compressor Unit




SmartBOX™



SmartGUARD™ Fire Alarm (Patented)



Air Extraction System



Honeycomb Table

| Specification                 |                  | MG380Hybrid   |   |
|-------------------------------|------------------|---|---|
| Model Name                    |                  | <b>MG380Hybrid-12100</b>  | <b>MG380Hybrid-25100</b>                        |
| Wattage                       |                  | Metal laser tube : 12W<br>Glass laser tube:100W   | Metal laser tube : 25W<br>Glass laser tube:100W |
| Laser Source                  |                  | Sealed CO <sub>2</sub> Laser  |   |
| Cooling                       |                  | Metal tube: Air-cooled / Glass tube: Water-cooled   |   |
| Working Area                  |                  | 38 x 24 in. ( 960 x 610 mm )  |   |
| Max. Part Size<br>(W x L x H) | All doors closed | 41 x 25 x 6.5 in. ( 1041 x 635 x 165 mm )   |   |
|                               | All doors open   | 41 x ∞ x 6.5 in. ( 1041 x ∞ x 165 mm )  |   |
| Table Size                    |                  | 42.7 x 29.5 in. ( 1085 x 750 mm )   |   |
| Dimensions                    |                  | 68.9 x 48.9 x 40 in. (1750 x 1242 x 1017 mm)  |   |
| Driver                        |                  | Closed-loop DC servo control  |   |
| Maximum Cutting Speed*        |                  | 40 IPS  |   |
| Speed Control                 |                  | Adjustable from 0.1~100% ( Up to 16 color-linked speed settings per job )   |   |
| Power Control                 |                  | Adjustable from 0~100% ( Up to 16 color-linked speed settings per job )   |   |
| Engraving Capability          |                  | 256-level gray scale image processing capability  |   |
| Distance Accuracy             |                  | 0.254 mm or 0.1% of move, whichever is greater  |   |
| Z-Axis Movement               |                  | Automatic   |   |
| Focus Lens                    |                  | Standard 2.0", optional 3"  |   |
| Computer Interface            |                  | 10 Base-T Ethernet, Full speed 2.0 USB  |   |
| Safety                        |                  | Class I Laser Product Compliant with EN60825<br>Class II Laser Product Compliant with CDRH<br>2006/42/EC Machinery Directive Compliance |   |
| Operation Voltage             |                  | 200-240 Volt AC   |   |
| Power Consumption             |                  | 1540W   |   |
| Water Chiller                 |                  | Water Chiller required  |   |
| Air Exhaust System            |                  | External exhaust system required  |   |

\* Speed does not equal to throughput. See dealer or visit [www.GCCworld.com](http://www.GCCworld.com) for more details.

\*\* File transmission at USB 2.0 Full Speed rate.

Δ Specifications are subject to change without prior notice.

■ TW Patent I430864.

■ US Patent 8,748,775 B2.

Authorized Dealer


[www.GCCworld.com](http://www.GCCworld.com)

Laser Cutter

GCC LaserPro


MG380Hybrid

Enjoy the best combination of CO<sub>2</sub> laser technologies

MG380Hybrid

- 38" x 24" (960 x 610 mm) working area
- Closed-loop DC servo control for precise and rapid movement of the laser carriage
- MG380Hybrid model for versatile cutting and engraving applications
- Reliable RF driven metal laser and DC CO<sub>2</sub> glass laser tube
- Pass-through doors for cutting of oversized objects
- Uniquely innovative user-friendly features

GCC Headquarters 4F-1, No.236, Fude 2nd Rd., Xizhi Dist., New Taipei City 22151, Taiwan 886-2-6616-6692 Fax : 886-2-2694-6875  
 GCC China No.1, Chen Feng Road, Yushan, Kunshan, Jiangsu 215300, China 86-512-5726-1515 Fax : 86-512-5726-1518  
 GCC Europe B.V. Eglantierbaan 43-45, 2908 LV, Capelle a/d IJssel, The Netherlands 31-10-458-9367 Fax : 31-10-451-9874  
 GCC America, Inc 323 Paseo Tesoro, Walnut, CA 91789, USA 1-909-718-0248 Fax : 1-909-718-0251  
 US & Canada Only Toll Free: 1-888-284-5211

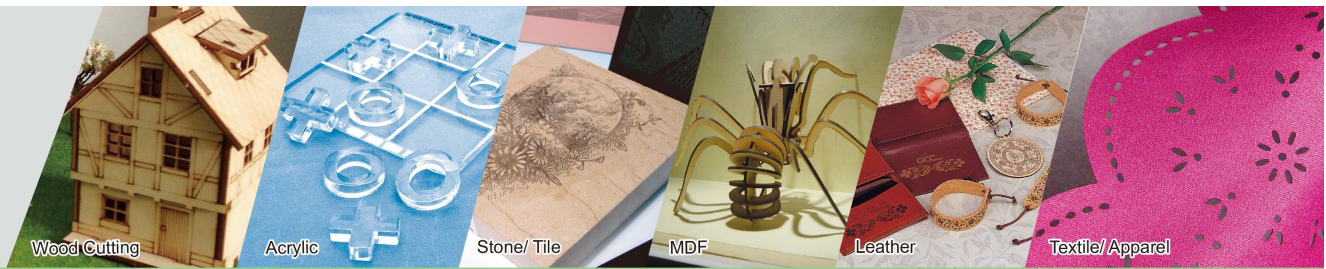

Laser Cutter

# GCC LaserPro MG380Hybrid



## GCC LaserPro MG380Hybrid

The GCC LaserPro MG380Hybrid is equipped with metal laser tube and glass laser tube at the same time which allow user to produce superior engraving and cutting work piece. All in one machine save your storage space and make your profit maximum. The GCC LaserPro users always have an edge over the others with numerous uniquely innovative and user friendly features.

### Superb Engraving and Cutting Quality

Embrace total solution in one machine. Innovative GCC LaserPro MG380Hybrid deliver superior engraving and cutting result by its high end technology.




### Programmable Origin

Easy-to-use position modes allow the operator an effortless way to setup a job with Drag-N-Engrave. Repetitive workflows can be drastically simplified by relocating the origin position to any desired location.

### Emergency Stop

Big red button located on the top of the machine allows operators to stop the laser and the motion carriage immediately to provide a highly safe operational environment.



### SmartBOX™ (Optional)

This innovative design is composed of a ventilation box, a honeycomb table and easily rearrangeable magnetic supporting pieces. The SmartBOX™ provides great cutting quality and remarkably enhances air extraction.

### Motion System with DC Servo Motor

The GCC LaserPro MG380Hybrid utilizes a high speed closed-loop DC servo motor for precise and fast carriage movement to ensure exceptionally accurate cutting outputs.



### Pass-Through Front and Rear Doors

This convenient front and rear door design enables operators to load extremely long working pieces.

### AutoFocus (Patented)

Patented AutoFocus adjusts the laser engraver to the precise focal point on the engraving area automatically. The AutoFocus is the most effective lens-focusing tool that prevents human error.



### Easy-to-use Control Panel

Designed for simplifying complex tasks, the GCC LaserPro MG380Hybrid's user-friendly interface is a great facilitator to provide powerful function settings.